

Triproof Lamp

BIGTUB1200B-P-33W



Source	LED
Connection	WP connectors
Gr. Power	33W ±5%
Input Voltage	AC200-240V
Driver	Internal
Control (standard)	Not dim.
Dimming option	
Beam Angle (°)	140
CCT (Kelvins)	3000°K; 4000°K; 5000°K; 5700°K
Lumens	3950-4150
Luminaire efficiency	126Lm/W
CRI (standard)	>80Ra
for option	
Fixture Color	Alum. + PC
Cover	Opal
Dimensions	dia 75*1200mm
Protection Rating	IP66/IK10/IP69K/GW850°
Electrical Class	Class I
Lifetime	>50.000h
Warranty	3 Years

Standard Packing Details

Unit Volum (CBM)	0,01847
Unit GW (kg)	1,8
Qty per carton	6


Other

Standard: Surface mounted; optional: Suspended mounted; linkable

Triproof Lamp

BIGTUB1200B-P-33W

Sizes drawing

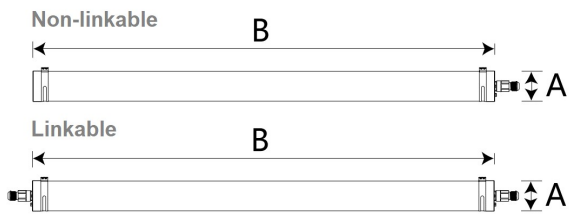


BIGTUB1200B-P-33W.drw

in mm

Illumination Diagram

4150Lm with 140° beam

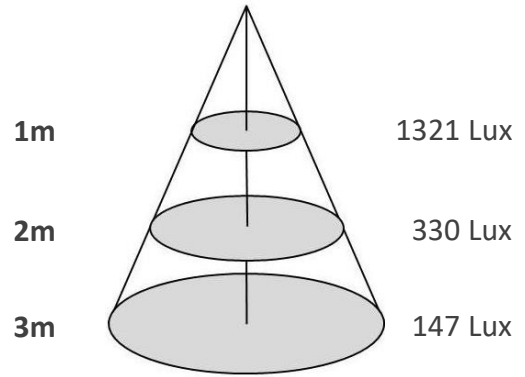

BIGTUB1200B-P-33W.lux

