

**Triproof Lamp**

**BIGTUB1500B-P-45W**



<b>Source</b>	LED
<b>Connection</b>	WP connectors
<b>Gr. Power</b>	45W ±5%
<b>Input Voltage</b>	AC200-240V
<b>Driver</b>	Internal
<b>Control (standard)</b>	Not dim.
<b>Dimming option</b>	
<b>Beam Angle (°)</b>	140
<b>CCT (Kelvins)</b>	3000°K; 4000°K; 5000°K; 5700°K
<b>Lumens</b>	5200-5500
<b>Luminaire efficiency</b>	122Lm/W
<b>CRI (standard)</b>	>80Ra
<b>for option</b>	
<b>Fixture Color</b>	Alum. + PC
<b>Cover</b>	Opal
<b>Dimensions</b>	dia 75*1500mm
<b>Protection Rating</b>	IP66/IK10/IP69K/GW850°
<b>Electrical Class</b>	Class I
<b>Lifetime</b>	>50.000h
<b>Warranty</b>	3 Years

**Other**  
Standard: Surface mounted; optional: Suspended mounted; linkable


**Standard Packing Details**

<b>Unit Volum (CBM)</b>	0,02370
<b>Unit GW (kg)</b>	2,25
<b>Qty per carton</b>	6

**Triproof Lamp**

**BIGTUB1500B-P-45W**

**Sizes drawing**

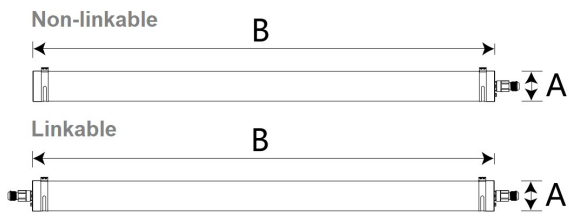


BIGTUB1500B-P-45W.drw

in mm

**Illumination Diagram**

5500Lm with 140° beam

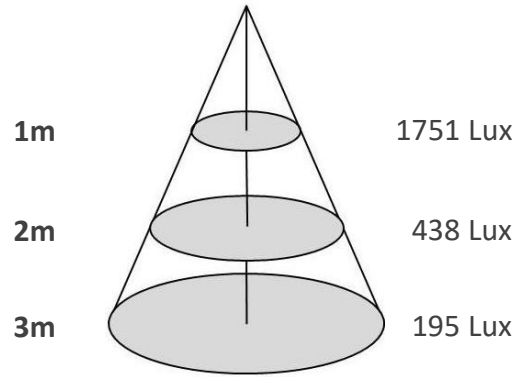

BIGTUB1500B-P-45W.lux

