

Triproof Lamp

BIGTUB600B-P-20W



Source	LED
Connection	WP connectors
Gr. Power	20W ±5%
Input Voltage	AC200-240V
Driver	Internal
Control (standard)	Not dim.
Dimming option	
Beam Angle (°)	140
CCT (Kelvins)	3000°K; 4000°K; 5000°K; 5700°K
Lumens	2250-2350
Luminaire efficiency	118Lm/W
CRI (standard)	>80Ra
for option	
Fixture Color	Alum. + PC
Cover	Opal
Dimensions	dia 75*600mm
Protection Rating	IP66/IK10/IP69K/GW850°
Electrical Class	Class I
Lifetime	>50.000h
Warranty	3 Years

Standard Packing Details

Unit Volum (CBM)	0,01085
Unit GW (kg)	1,05
Qty per carton	6


Other

Standard: Surface mounted; optional: Suspended mounted; linkable

Triproof Lamp

BIGTUB600B-P-20W

Sizes drawing

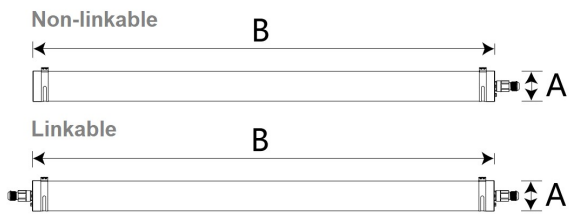


BIGTUB600B-P-20W.drw

in mm

Illumination Diagram

2350Lm with 140° beam

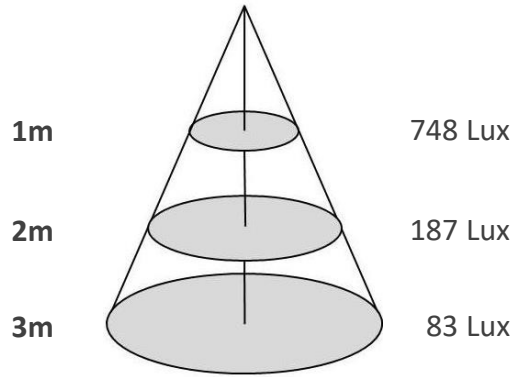

BIGTUB600B-P-20W.lux

