

COB2-DWR120-20W

Picture



Description

Type	LED Downlight
Connection	Wire

Electrical Parameters

Gr. Power	20W $\pm 5\%$
Input Voltage	AC200-240V
Driver	Lifud
Dimmable	Not dim.

Lighting Parameters

Beam Angle	20/38/60/110
Colors	3000°K; 4000°K; 6000°K
Lumens	1760-1980
CRI	90Ra

Structure Parameters


Fixture Color	White; Black
Cover	Clear
Dimensions	dia120*65mm (hole95-110)

Protection Parameters

Rating	IP33/UGR<19
Electrical Class	Class II
Lifetime	LM79/LM80
Warranty (Years)	5

Options

Dimmable	Triac <input checked="" type="checkbox"/> 0-10V <input type="checkbox"/> 1-10V <input checked="" type="checkbox"/> DALI <input checked="" type="checkbox"/>
CRI	>90Ra <input type="checkbox"/> >92Ra <input type="checkbox"/> >95Ra <input type="checkbox"/> >98Ra <input type="checkbox"/>
Other	Optional: 110°; special CCT; IP54; Honeycomb Louver; Silver housing

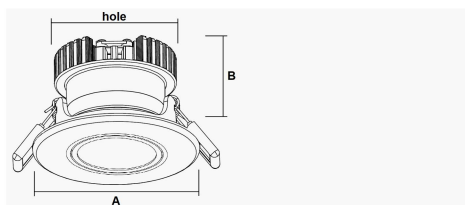

Sizes in mm

Packing

Unit Volum (CBM)	0,002194836
Unit GW (kg)	0,55
Qty per carton	40