

## Downlight

### COB2-DWR180-30W

#### Picture



#### Description

**Type** LED Downlight  
**Connection** Wire

#### Electrical Parameters

**Gr. Power** 30W ±5%  
**InputVoltage** AC200-240V  
**Driver** Lifud  
**Dimmable** Not dim.

#### Lighting Parameters

**Beam Angle** 20/38/60/110  
**Colors** 3000°K; 4000°K; 6000°K  
**Lumens** 2950-3600  
**CRI** 90Ra

#### Structure Parameters


**Fixture Color** White; Black  
**Cover** Clear  
**Dimensions** dia180\*82mm (hole145-170)

#### Protection Parameters

**Rating** IP33/UGR<19  
**Electrical Class** Class II  
**Lifetime** LM79/LM80  
**Warranty (Years)** 5

#### Options

**Dimmable** Triac  0-10V  1-10V  DALI   
**CRI** >90Ra  >92Ra  >95Ra  >98Ra   
**Other** Optional: 110°; special CCT; IP54; Honeycomb Louver; Silver housing

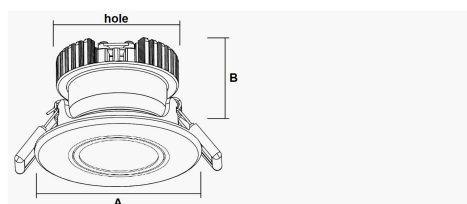

Sizes in mm

#### Packing

**UnitVolum (CBM)** 0,00567967875  
**Unit GW (kg)** 1,19  
**Qty per carton** 16