

## Downlight

### DWC160.160-P-30W

#### Picture



#### Description

Type	LED Downlight
Connection	Wire

#### Electrical Parameters

Gr. Power	30W ±5%
InputVoltage	AC200-240V
Driver	Lifud
Dimmable	Not dim.

#### Lighting Parameters

Beam Angle	20/38/60/110
Colors	3000°K; 4000°K
Lumens	3000-3500
CRI	90Ra

#### Structure Parameters


Fixture Color	White; Black; Silver
Cover	Center-frosted; Clear; Frosted
Dimensions	160*160*100mm (hole 145)

#### Protection Parameters

Rating	Indoor Use
Electrical Class	Class II
Lifetime	LM79/LM80
Warranty (Years)	5

#### Options

Dimmable	Triac <input checked="" type="checkbox"/> 0-10V <input type="checkbox"/> 1-10V <input checked="" type="checkbox"/> DALI <input checked="" type="checkbox"/>
CRI	>90Ra <input type="checkbox"/> >92Ra <input type="checkbox"/> >95Ra <input checked="" type="checkbox"/> >98Ra <input type="checkbox"/>
Other	Optional: 110°; special CCT; IP54

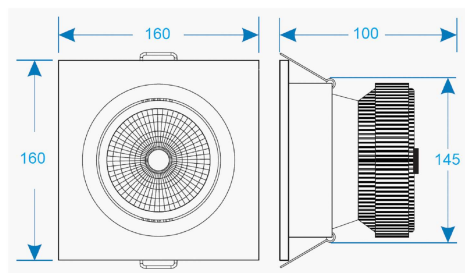

Sizes in mm

#### Packing

UnitVolum (CBM)	0,00711399
Unit GW (kg)	1,63
Qty per carton	12