

DWR105-DR-P-20W



Source	LED Bridgelux
Connection	Wire
Gr. Power	20W $\pm$ 5%
Input Voltage	AC85-277V
Driver	Included
Control (standard)	Not dim.
Dimming option	Triac dim.; 0-10V dim.; DALI
Beam Angle (°)	15/24/38
CCT (Kelvins)	2700°K; 3000°K; 4000°K; 5000°K; 6500°K; 5700°K
Lumens	1900-2100
Luminaire efficiency	105Lm/W
CRI (standard)	>80Ra
for option	
Fixture Color	White; Black
Cover	Clear
Dimensions	Dia A105*B108 (C95)mm
Protection Rating	IP44
Electrical Class	Class II
Lifetime	>50.000h
Warranty	3 Years

Standard Packing Details


Unit Volum (CBM)	0,00147
Unit GW (kg)	0
Qty per carton	15

Other

Flicker free driver; reflector cup: Silver, Gold, Alum. White, Alum. Black

DWR105-DR-P-20W

Sizes drawing

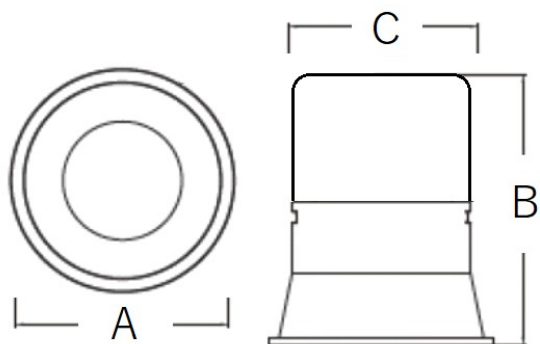


DWR105-DR-P-20W.drw

in mm

Illumination Diagram

2100Lm with 24° beam

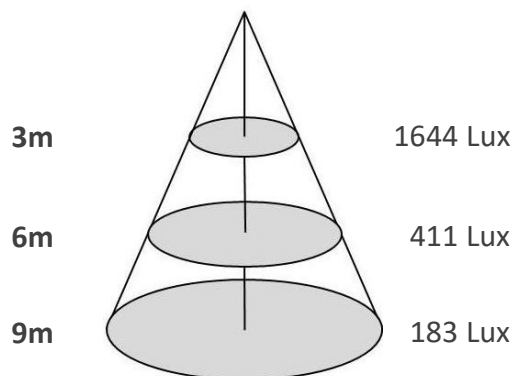

DWR105-DR-P-20W.lux

