

INDOOR30-5050

Picture



Description

| | |
|------------|-----------|
| Type | LED Strip |
| Connection | Wire |

Electrical Parameters

| | |
|---------------|--------------|
| Gr. Power | 7,2W ±5% |
| Input Voltage | DC12V; DC24V |
| Driver | Not Included |
| Dimmable | Dimmable |

Lighting Parameters

| | |
|------------|---------------------------------|
| Beam Angle | 120 |
| Colors | WW; DL; CW; Red; Green; Blue; Y |
| Lumens | 3000-3250 |
| CRI | 80Ra |

Structure Parameters


| | |
|---------------|---------------|
| Fixture Color | White |
| Cover | No |
| Dimensions | 5 meters/roll |

Protection Parameters

| | |
|------------------|-----------|
| Rating | IP20 |
| Electrical Class | Class III |
| Lifetime | >50.000h |
| Warranty (Years) | 2 |

Options

| | |
|----------|---|
| Dimmable | Triac <input type="checkbox"/> 0-10V <input type="checkbox"/> 1-10V <input type="checkbox"/> DALI <input type="checkbox"/> |
| CRI | >90Ra <input type="checkbox"/> >92Ra <input type="checkbox"/> >95Ra <input type="checkbox"/> >98Ra <input type="checkbox"/> |
| Other | in option: available in >70Ra; >95Ra |

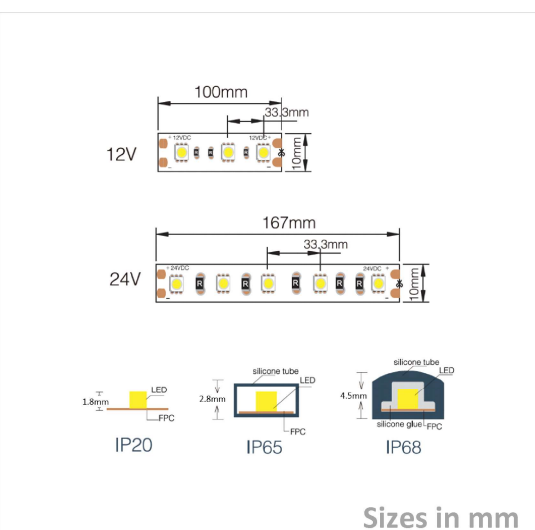

Packing

| | |
|------------------|-------------|
| Unit Volum (CBM) | 0,000776832 |
| Unit GW (kg) | 0,14 |
| Qty per carton | 55 |