


Architectural Light

LINE1000.48-P-24W

Picture

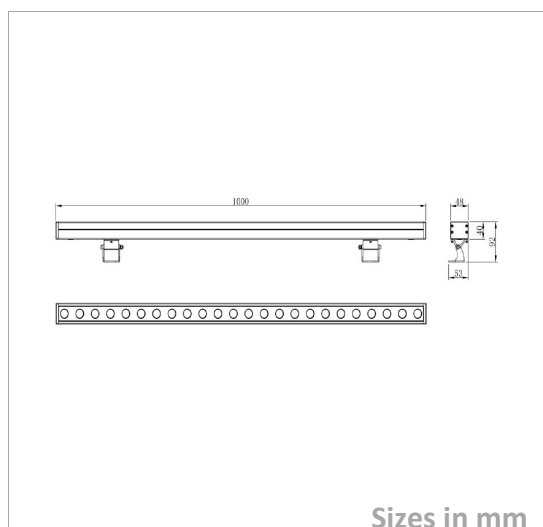

Packing

UnitVolum (CBM)	0,0125664
Unit GW (kg)	2,7
Qty per carton	1

Description

Type	LED Architectural Light
Connection	Wire

Electrical Parameters

Gr. Power	24W $\pm$ 5%
InputVoltage	DC24V
Driver	Not Included
Dimmable	Not dim.

Lighting Parameters

Beam Angle	6/10/15/20/25/30/40/60/15*60/
Colors	WW; DL; CW; Red; Green; Blue; Y
Lumens	1800
CRI	80Ra

Structure Parameters

Fixture Color	Die Cast
Cover	PMMA
Dimensions	1000*48*40(92)mm

Protection Parameters

Rating	IP65/IK07
Electrical Class	Class I ☐ Class II ☒ Class III ☐
Lifetime	>50.000h
Warranty (Years)	3

Options

Dimmable	Triac ☐ 0-10V ☐ 1-10V ☐ DALI ☐
CRI	>90Ra ☐ >92Ra ☐ >95Ra ☐ >98Ra ☐
Other	