

OUTDOOR60-5050 IP65

Picture



Description

Type	LED Strip
Connection	Wire

Electrical Parameters

Gr. Power	14,4W ±5%
InputVoltage	DC12V; DC24V
Driver	Not Included
Dimmable	Dimmable

Lighting Parameters

Beam Angle	120
Colors	WW; DL; CW; Red; Green; Blue; Y
Lumens	6000-6500
CRI	80Ra

Structure Parameters

Fixture Color	White
Cover	Clear
Dimensions	5 meters/roll


Protection Parameters

Rating	IP65
Electrical Class	Class III
Lifetime	>50.000h
Warranty (Years)	2

Options

Dimmable	Triac <input type="checkbox"/> 0-10V <input type="checkbox"/> 1-10V <input type="checkbox"/> DALI <input type="checkbox"/>
CRI	>90Ra <input type="checkbox"/> >92Ra <input type="checkbox"/> >95Ra <input type="checkbox"/> >98Ra <input type="checkbox"/>
Other	in option: available in >70Ra; >95Ra; IP66; IP68

CANDeLeC Industries

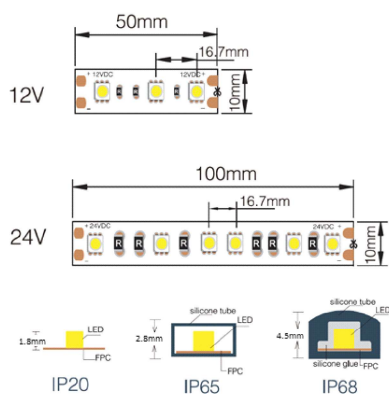

Sizes in mm

Packing

UnitVolum (CBM)	0,00176256
Unit GW (kg)	0,55
Qty per carton	10