


**PANEL60.60-LOUVER2-30W**

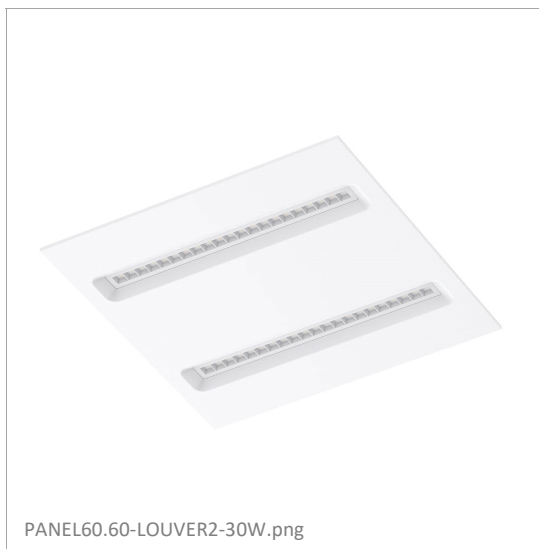

<b>Source</b>	LED
<b>Connection</b>	Wire
<b>Gr. Power</b>	30W ±5%
<b>Input Voltage</b>	AC175-265V
<b>Driver</b>	Included
<b>Control (standard)</b>	Not dim.
<b>Dimming option</b>	Triac dim.; 0-10V dim.; DALI
<b>Beam Angle (°)</b>	90
<b>CCT (Kelvins)</b>	3000°K; 4000°K; 5000°K; 5700°K
<b>Lumens</b>	3200-3800
<b>Luminaire efficiency</b>	127Lm/W
<b>CRI (standard)</b>	>80Ra
<b>for option</b>	
<b>Fixture Color</b>	White
<b>Cover</b>	Louver
<b>Dimensions</b>	595*595*31mm
<b>Protection Rating</b>	IP20; IK06; UGR<16
<b>Electrical Class</b>	Class II
<b>Lifetime</b>	>50.000h
<b>Warranty</b>	3 Years


**Standard Packing Details**

<b>Unit Volum (CBM)</b>	0,02506
<b>Unit GW (kg)</b>	3,1
<b>Qty per carton</b>	5

**Other**  
Suspended, surface mounted or recessed mounting

**PANEL60.60-LOUVER2-30W**

**Sizes drawing**

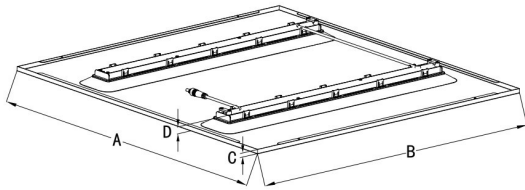


PANEL60.60-LOUVER2-30W.drw

**in mm**

**Illumination Diagram**

3800Lm with 90° beam

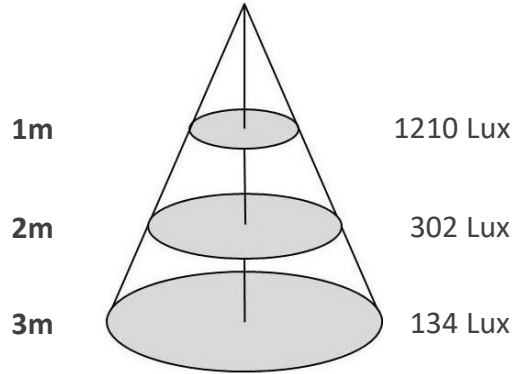

PANEL60.60-LOUVER2-30W.lux

