

## PANEL60.60-TR-P-32W



<b>Source</b>	LED
<b>Connection</b>	Wire
<b>Gr. Power</b>	32W ±5%
<b>Input Voltage</b>	AC220-240V
<b>Driver</b>	Included
<b>Control (standard)</b>	Not dim.
<b>Dimming option</b>	Triac dim.; 0-10V dim.; DALI
<b>Beam Angle (°)</b>	130
<b>CCT (Kelvins)</b>	3000°K; 4000°K; 5000°K; 5700°K
<b>Lumens</b>	3380-3800
<b>Luminaire efficiency</b>	119Lm/W
<b>CRI (standard)</b>	>80Ra
<b>for option</b>	
<b>Fixture Color</b>	White
<b>Cover</b>	PC; PMMA
<b>Dimensions</b>	595*595*54*10mm
<b>Protection Rating</b>	IP20/IK06/750°C GW
<b>Electrical Class</b>	Class II
<b>Lifetime</b>	>50.000h
<b>Warranty</b>	3 Years

### Standard Packing Details


<b>Unit Volum (CBM)</b>	0,03238
<b>Unit GW (kg)</b>	3,2
<b>Qty per carton</b>	4

### Other

In option: Adjustable 3 CCT; Emergency kit 4 or 10W

### PANEL60.60-TR-P-32W

Sizes drawing

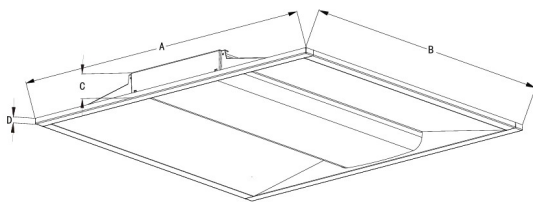


PANEL60.60-TR-P-32W.drw

in mm

Illumination Diagram

3800Lm with 130° beam

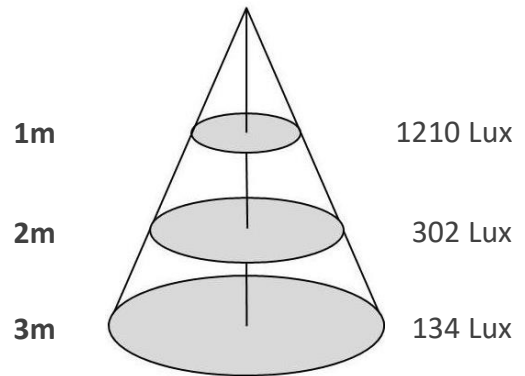

PANEL60.60-TR-P-32W.lux

