

Underwater Light

POOL180R-P-24W



POOL180R-P-24W.png

Source	LED
Connection	Wire
Gr. Power	24W ±5%
Input Voltage	DC24V
Driver	Not Included
Control (standard)	Not dim.
Dimming option	Dimmable
Beam Angle (°)	ASY 20*40/15/25/45/60/15*45
CCT (Kelvins)	3000°K; 4500°K; 6500°K; Red; Green; Blue; Yellow
Lumens	2250
Luminaire efficiency	94 Lm/W
CRI (standard)	>80Ra
for option	
Fixture Color	SS316
Cover	Clear
Dimensions	dia 180*56(169*120)mm
Protection Rating	IP68/IK08
Electrical Class	Class III
Lifetime	>50.000h
Warranty	3 Years

Standard Packing Details

Unit Volum (CBM)	0,00582
Unit GW (kg)	2,63
Qty per carton	8


Other

In option: Mounting bracker, tripod, RGB; RGBW; DMX; available in COB


Underwater Light

POOL180R-P-24W

Sizes drawing

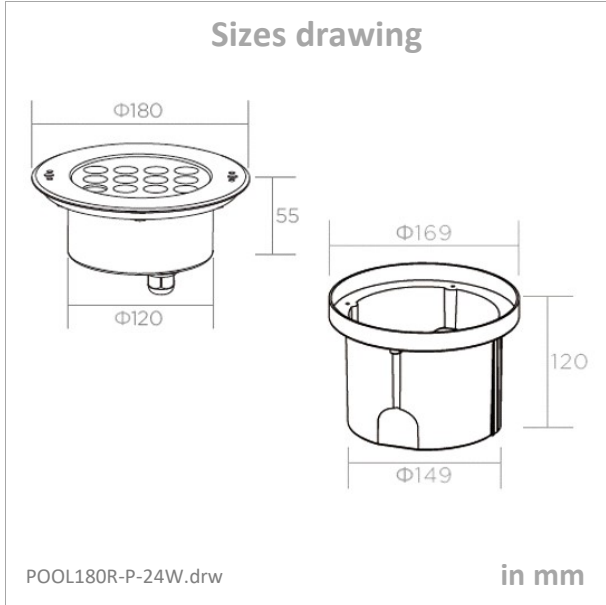

Illumination Diagram

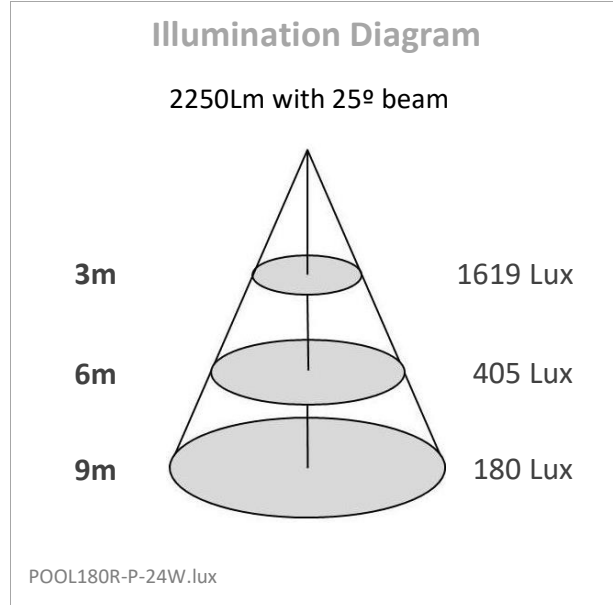

Optic type:



Mounting:

