

Flood light

PROJ-FK-P-150W



Source	LED
Connection	Wire
Gr. Power	150W $\pm$ 5%
Input Voltage	AC100-277V
Driver	Internal
Control (standard)	Not dim.
Dimming option	1-10V dim; DALI
Beam Angle (°)	30/60/90/120/T2M/T3M
CCT (Kelvins)	3000°K; 4000°K; 6500°K
Lumens	22500
Luminaire efficiency	150Lm/W
CRI (standard)	>80Ra
for option	
Fixture Color	Black; Silver; Grey
Cover	Clear
Dimensions	394*392*57mm
Protection Rating	IP66/IK08
Electrical Class	Class I
Lifetime	>50.000h
Warranty	5 Years

Standard Packing Details

Unit Volum (CBM)	0,02262
Unit GW (kg)	6,3
Qty per carton	1

Other

Option: Marine corrosion coating; Flicker free driver; MeanWell Driver; 3 years ECO version

Flood light

PROJ-FK-P-150W

Sizes drawing




PROJ-FK-P-150W.drw

in mm

Illumination Diagram

22500Lm with 60° beam

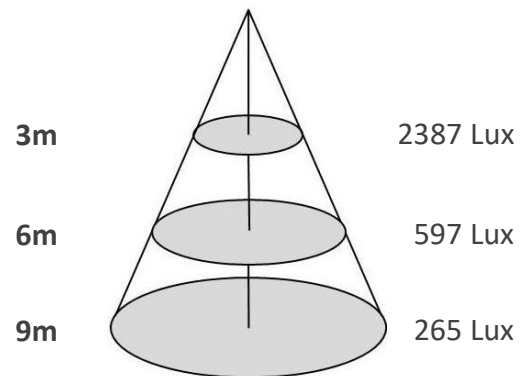

PROJ-FK-P-150W.lux

