

Flood light

PROJ-FK-P-200W



Source	LED
Connection	Wire
Gr. Power	200W $\pm$ 5%
Input Voltage	AC100-277V
Driver	Internal
Control (standard)	Not dim.
Dimming option	1-10V dim; DALI
Beam Angle (°)	30/60/90/120/T2M/T3M
CCT (Kelvins)	3000°K; 4000°K; 6500°K
Lumens	30000
Luminaire efficiency	150Lm/W
CRI (standard)	>80Ra
for option	
Fixture Color	Black; Silver; Grey
Cover	Clear
Dimensions	445*392*57mm
Protection Rating	IP66/IK08
Electrical Class	Class I
Lifetime	>50.000h
Warranty	5 Years

Standard Packing Details

Unit Volum (CBM)	0,02519
Unit GW (kg)	7
Qty per carton	1


Other

Option: Marine corrosion coating; Flicker free driver; MeanWell Driver; 3 years ECO version

Flood light


PROJ-FK-P-200W

Sizes drawing

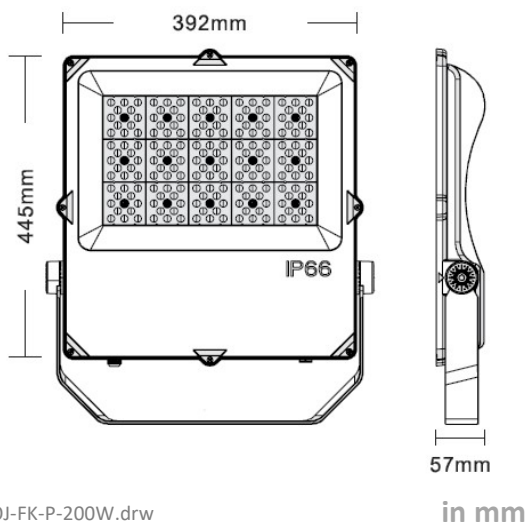

Illumination Diagram

30000Lm with 60° beam

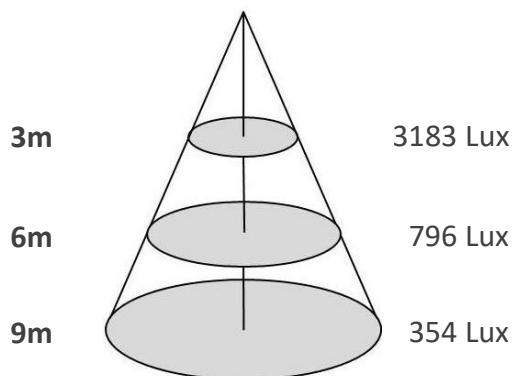

PROJ-FK-P-200W.lux

