


Ceiling Lamp

PURE400-P-40W (up & down)

Picture

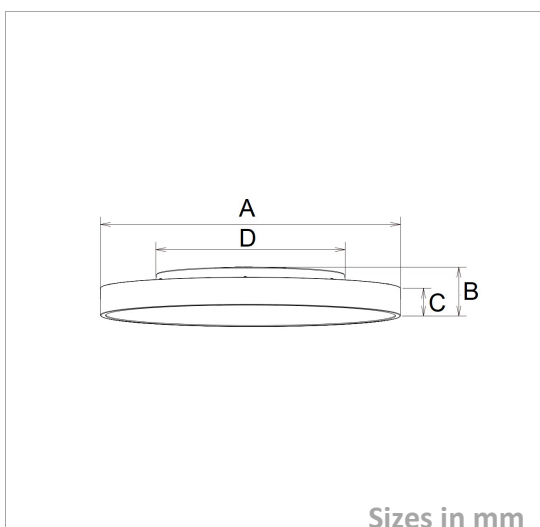

Packing

UnitVolum (CBM)	0,0249288
Unit GW (kg)	3,8
Qty per carton	6

Description

Type	LED Ceiling Lamp
Connection	Wire

Electrical Parameters

Gr. Power	40W ±5%
InputVoltage	AC220-240V
Driver	Internal
Dimmable	Not dim.

Lighting Parameters

Beam Angle	120
Colors	3000°K; 4000°K; 5000°K; 5700°K
Lumens	3500-4300 (10% up & 90% down)
CRI	80Ra

Structure Parameters

Fixture Color	White; Black
Cover	Milky
Dimensions	A400*B86*C55*D219

Protection Parameters

Rating	IP40/G.W.650°
Electrical Class	Class I
Lifetime	>50.000h
Warranty (Years)	3

Options

Dimmable	Triac <input type="checkbox"/> 0-10V <input type="checkbox"/> 1-10V <input type="checkbox"/> DALI <input checked="" type="checkbox"/>
CRI	>90Ra <input type="checkbox"/> >92Ra <input type="checkbox"/> >95Ra <input type="checkbox"/> >98Ra <input type="checkbox"/>
Other	Options: 100% down; 3 CCT switch; Micro Prismatic Diffusor Installation: Surface, Suspended