

Inground Light

SOLEN215-DR-P-30W



Source	LED
Connection	Wire
Gr. Power	30W $\pm$ 5%
Input Voltage	DC24V
Driver	Internal
Control (standard)	Not dim.
Dimming option	Dimmable
Beam Angle (°)	6/12/15/20/30/45/120
CCT (Kelvins)	WWY; WW; DL; CW
Lumens	2400-2700
Luminaire efficiency	90 Lm/W
CRI (standard)	>80Ra
for option	
Fixture Color	SS316
Cover	Clear; Frosted
Dimensions	dia 215*173(230*230*205)mm
Protection Rating	IP67/IK10
Electrical Class	Class III
Lifetime	>50.000h
Warranty	3 Years

Standard Packing Details


Unit Volum (CBM)	0,01722
Unit GW (kg)	3,8
Qty per carton	4

Other

Orientable 26W (DRO) or COB for option; RGB; RGBW

SOLEN215-DR-P-30W

Sizes drawing

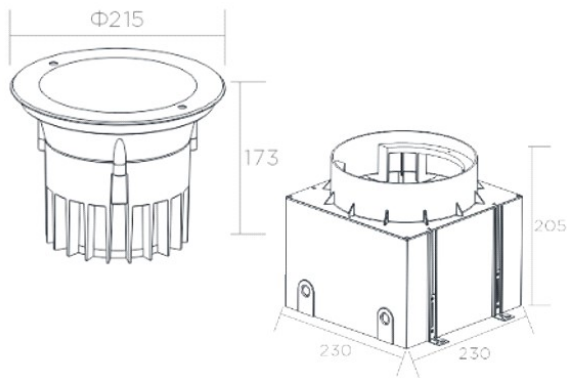


SOLEN215-DR-P-30W.drw

in mm

Illumination Diagram

2700Lm with 20° beam

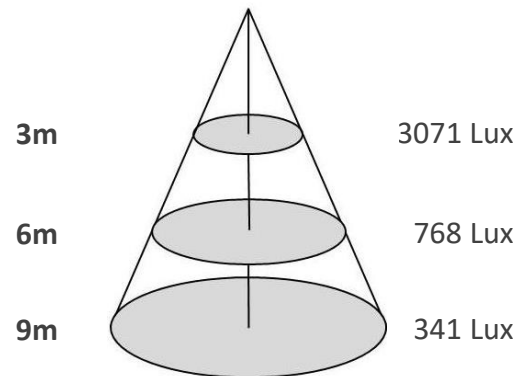

SOLEN215-DR-P-30W.lux

