


### UFO-BT2-P-200W

#### Picture



Nichia LED

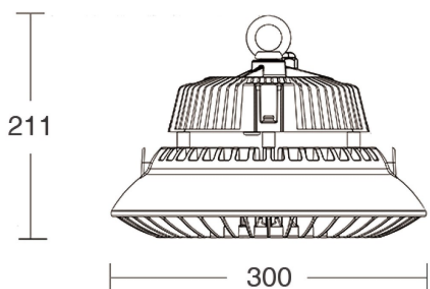

Sizes in mm

#### Packing

Unit Volum (CBM)	0,0412335
Unit GW (kg)	6,6
Qty per carton	1

#### Description

Type	LED Highbay
Connection	Wire

#### Electrical Parameters

Gr. Power	200W ±5%
Input Voltage	AC90-305V
Driver	Meanwell
Dimmable	Not dim.

#### Lighting Parameters

Beam Angle	120
Colors	2700°K; 3000°K; 4000°K; 5000°K;
Lumens	25000
CRI	80Ra

#### Structure Parameters

Fixture Color	White; Black; Grey
Cover	Clear
Dimensions	dia.300x211mm

#### Protection Parameters

Rating	IP65 & IK08
Electrical Class	Class I <input checked="" type="checkbox"/> Class II <input type="checkbox"/> Class III <input type="checkbox"/>
Lifetime	L70>100.000h
Warranty (Years)	5

#### Options

Dimmable	Triac <input type="checkbox"/> 0-10V <input type="checkbox"/> 1-10V <input checked="" type="checkbox"/> DALI <input checked="" type="checkbox"/>
CRI	>90Ra <input checked="" type="checkbox"/> >92Ra <input type="checkbox"/> >95Ra <input type="checkbox"/> >98Ra <input type="checkbox"/>
Other	in option: 60 or 90° Alum. & 70° PC reflector; Sensor; Bracket; Shield; Wire-guard; 200-520V