

UFO-BT3-C-200W

Picture



Description

Type	LED Highbay
Connection	Wire

Electrical Parameters

Gr. Power	200W ±5%
InputVoltage	AC100-277V
Driver	Internal
Dimmable	Not dim.

Lighting Parameters

Beam Angle	120
Colors	4000°K; 5000°K; 5700°K
Lumens	150Lm/W
CRI	80Ra

Structure Parameters


Fixture Color	White; Black
Cover	Clear
Dimensions	dia.275*152mm

Protection Parameters

Rating	IP66 & IK08
Electrical Class	Class I <input checked="" type="checkbox"/> Class II <input type="checkbox"/> Class III <input type="checkbox"/>
Lifetime	L70>100.000h
Warranty (Years)	5

Options

Dimmable	Triac <input type="checkbox"/> 0-10V <input type="checkbox"/> 1-10V <input checked="" type="checkbox"/> DALI <input type="checkbox"/>
CRI	>90Ra <input type="checkbox"/> >92Ra <input type="checkbox"/> >95Ra <input type="checkbox"/> >98Ra <input type="checkbox"/>
Other	in option: MW sensor; Milky PC; 60 or 90° Alum. Reflector; 70° PC reflector; 60 or 90° PC lens; bracket; wire guard

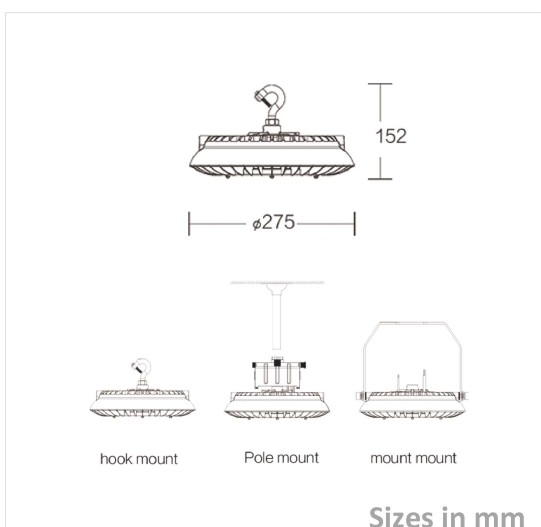

Sizes in mm

Packing

UnitVolum (CBM)	0,01414944
Unit GW (kg)	3,43
Qty per carton	1