

### UFO-HB06-P-120W

#### Picture



#### Description

Type	LED Highbay
Connection	Wire

#### Electrical Parameters

Gr. Power	120W ±5%
Input Voltage	AC100-240V
Driver	Sosen
Dimmable	Not dim.

#### Lighting Parameters

Beam Angle	120
Colors	3000°K; 4000°K; 5000°K
Lumens	140Lm/W
CRI	80Ra

#### Structure Parameters


Fixture Color	Black
Cover	Lens
Dimensions	dia489x200mm

#### Protection Parameters

Rating	IP66/IP69K/IK08/UGR<25
Electrical Class	Class I
Lifetime	>50.000h
Warranty (Years)	5

#### Options

Dimmable	Triac <input type="checkbox"/> 0-10V <input type="checkbox"/> 1-10V <input type="checkbox"/> DALI <input checked="" type="checkbox"/>
CRI	>90Ra <input type="checkbox"/> >92Ra <input type="checkbox"/> >95Ra <input type="checkbox"/> >98Ra <input type="checkbox"/>
Other	in option: 160Lm/W; Nichia LED; MeanWell driver; 50, 90 or 120° Lens; Alum. Reflector; PC reflector; bracket; IK10

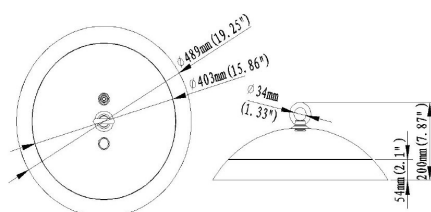

Sizes in mm

#### Packing

Unit Volum (CBM)	0,08465184
Unit GW (kg)	9,3
Qty per carton	1