

UFO-HB06-P-200W

Picture



Description

Type	LED Highbay
Connection	Wire

Electrical Parameters

Gr. Power	200W ±5%
Input Voltage	AC100-240V
Driver	Sosen
Dimmable	Not dim.

Lighting Parameters

Beam Angle	120
Colors	3000°K; 4000°K; 5000°K
Lumens	140Lm/W
CRI	80Ra

Structure Parameters


Fixture Color	Black
Cover	Lens
Dimensions	dia489x200mm

Protection Parameters

Rating	IP66/IP69K/IK08/UGR<25
Electrical Class	Class I
Lifetime	>50.000h
Warranty (Years)	5

Options

Dimmable	Triac <input type="checkbox"/> 0-10V <input type="checkbox"/> 1-10V <input type="checkbox"/> DALI <input checked="" type="checkbox"/>
CRI	>90Ra <input type="checkbox"/> >92Ra <input type="checkbox"/> >95Ra <input type="checkbox"/> >98Ra <input type="checkbox"/>
Other	in option: 160Lm/W; Nichia LED; MeanWell driver; 50, 90 or 120° Lens; Alum. Reflector; PC reflector; bracket; IK10

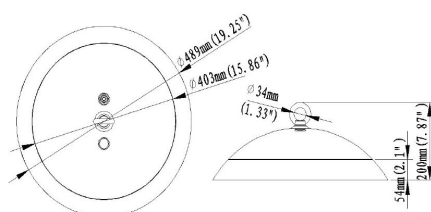

Sizes in mm

Packing

Unit Volum (CBM)	0,08465184
Unit GW (kg)	9,3
Qty per carton	1