


### WALL-SIMPLY-P-20W

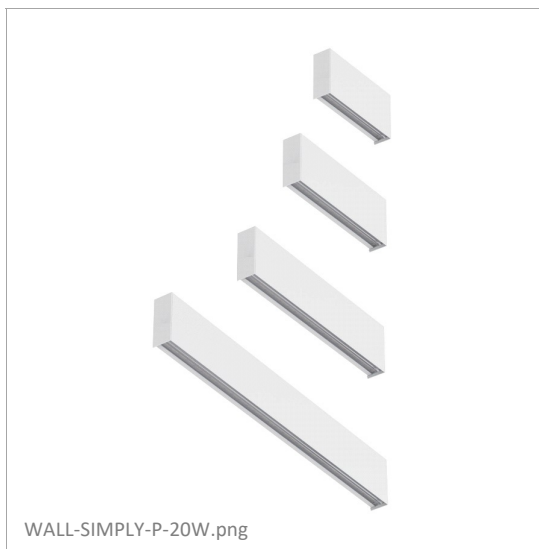

|                             |                        |
|-----------------------------|------------------------|
| <b>Source</b>               | LED                    |
| <b>Connection</b>           | Wire                   |
| <b>Gr. Power</b>            | 20W $\pm$ 5%           |
| <b>Input Voltage</b>        | AC220-240V             |
| <b>Driver</b>               | Internal               |
| <b>Control (standard)</b>   | Not dim.               |
| <b>Dimming option</b>       | Triac dim.             |
| <b>Beam Angle (°)</b>       | 40                     |
| <b>CCT (Kelvins)</b>        | 3000°K; 4000°K; 5000°K |
| <b>Lumens</b>               | 1900-2300              |
| <b>Luminaire efficiency</b> | 115Lm/W                |
| <b>CRI (standard)</b>       | >80Ra                  |
| <b>for option</b>           |                        |
| <b>Fixture Color</b>        | White; Black           |
| <b>Cover</b>                | PMMA                   |
| <b>Dimensions</b>           | A:600*B:38,5*C:90mm    |
| <b>Protection Rating</b>    | IP20/IK08              |
| <b>Electrical Class</b>     | Class I                |
| <b>Lifetime</b>             | >50.000h               |
| <b>Warranty</b>             | 3 Years                |

#### Standard Packing Details


|                         |         |
|-------------------------|---------|
| <b>Unit Volum (CBM)</b> | 0,00569 |
| <b>Unit GW (kg)</b>     | 1,52    |
| <b>Qty per carton</b>   | 12      |

#### Other

Exists in 8, 10, 16 and 20W. For option: 2 CCT switch 3000K+4000K

### WALL-SIMPLY-P-20W

Sizes drawing

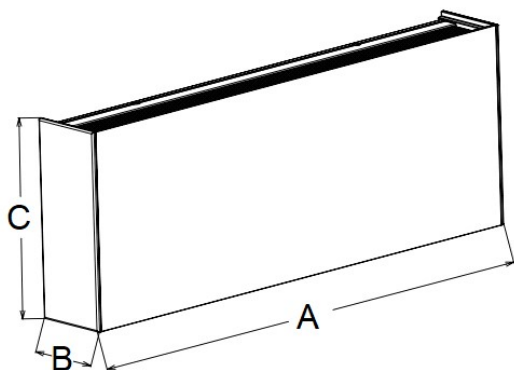


WALL-SIMPLY-P-20W.drw

in mm

Illumination Diagram

2300Lm with 40° beam

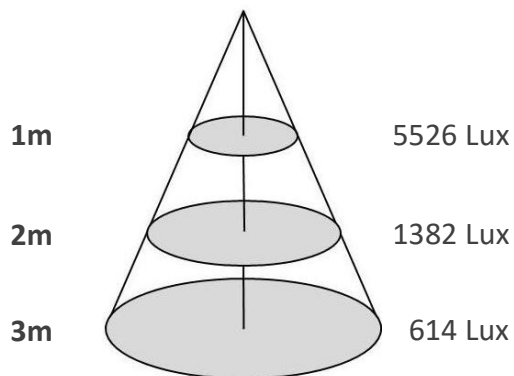

WALL-SIMPLY-P-20W.lux

