

Outdoor Wall Light

WALL75-P-10W



WALL75-P-10W.png


Source	LED
Connection	Wire
Gr. Power	10W ±5%
Input Voltage	AC220-240V
Driver	Internal
Control (standard)	Not dim.
Dimming option	
Beam Angle (°)	8° polarized up/down
CCT (Kelvins)	3000°K; 4000°K; 5000°K; 5700°K; CCT adjust.
Lumens	940-1050
Luminaire efficiency	105Lm/W
CRI (standard)	>80Ra
for option	
Fixture Color	White; Black
Cover	Lens
Dimensions	A:175*B:90*C:30,5mm (D:34,5*E:
Protection Rating	IP65/IK08/GW750°C
Electrical Class	Class I
Lifetime	L 70B50 > 50.000h
Warranty	3 Years

Standard Packing Details

Unit Volum (CBM)	0,00186
Unit GW (kg)	0,72
Qty per carton	18

Other
Optional: 3CCT switch

WALL75-P-10W

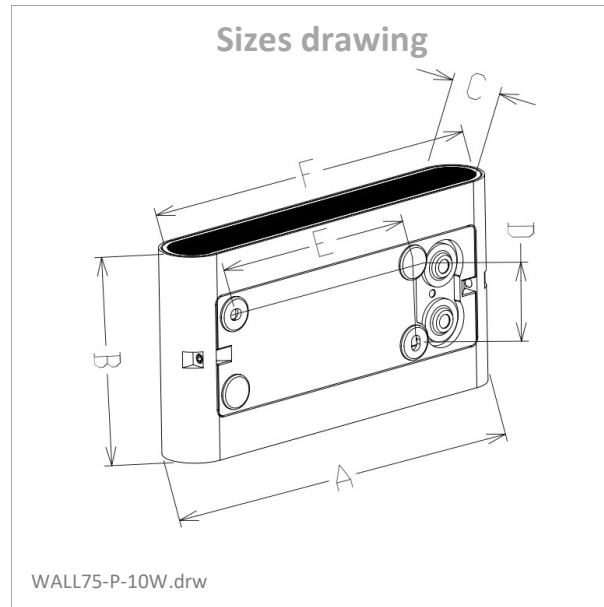

in mm



WALL75 PC Lens



WALL75B PC Diffuser

