

Wall Light

**WALL1000LB-C-30W**



<b>Source</b>	LED
<b>Connection</b>	Wire
<b>Gr. Power</b>	30W ±5%
<b>Input Voltage</b>	AC85-265V
<b>Driver</b>	Internal
<b>Control (standard)</b>	Not dim.
<b>Dimming option</b>	
<b>Beam Angle (°)</b>	180
<b>CCT (Kelvins)</b>	3000°K; 6000°K
<b>Lumens</b>	1800-2400
<b>Luminaire efficiency</b>	80 Lm/W
<b>CRI (standard)</b>	>80Ra
<b>for option</b>	
<b>Fixture Color</b>	Black; Gold
<b>Cover</b>	Opal
<b>Dimensions</b>	1000*90*40mm
<b>Protection Rating</b>	Indoor
<b>Electrical Class</b>	Class II
<b>Lifetime</b>	>50.000h
<b>Warranty</b>	2 Years

**Other**  
IP65; PIR sensor; DC24V (PWM dimmable); available from 30 to 200cm


**Standard Packing Details**

<b>Unit Volum (CBM)</b>	0,02246
<b>Unit GW (kg)</b>	4,4
<b>Qty per carton</b>	6

## Wall Light

### WALL1000LB-C-30W

Sizes drawing

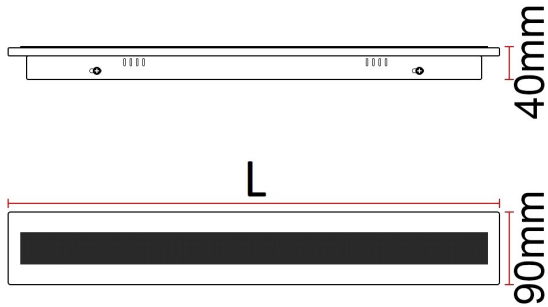


WALL1000LB-C-30W.drw

in mm

Illumination Diagram

2400Lm with 180° beam

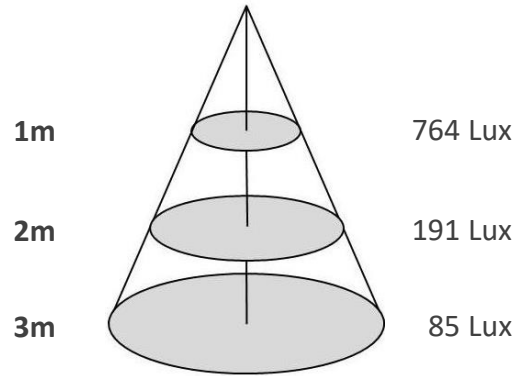

WALL1000LB-C-30W.lux

