

Wall Light

WALL1500LB-C-40W



Source	LED
Connection	Wire
Gr. Power	18W ±5%
Input Voltage	AC85-265V
Driver	Internal
Control (standard)	Not dim.
Dimming option	
Beam Angle (°)	180
CCT (Kelvins)	3000°K; 6000°K
Lumens	2400-3200
Luminaire efficiency	178Lm/W
CRI (standard)	>80Ra
for option	
Fixture Color	Black; Gold
Cover	Opal
Dimensions	1500*90*40mm
Protection Rating	Indoor
Electrical Class	Class II
Lifetime	>50.000h
Warranty	2 Years

Standard Packing Details

Unit Volum (CBM)	0,03257
Unit GW (kg)	6,6
Qty per carton	6


Other

IP65; PIR sensor; DC24V (PWM dimmable); available from 30 to 200cm

Wall Light

WALL1500LB-C-40W

Sizes drawing

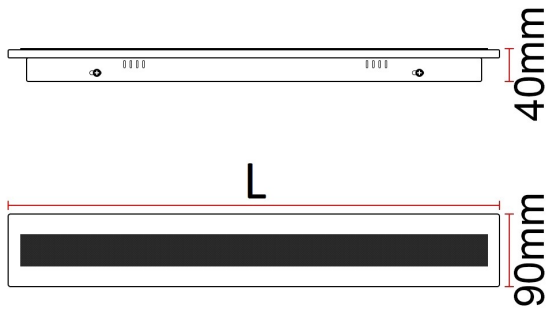


WALL1500LB-C-40W.drw

in mm

Illumination Diagram

3200Lm with 180° beam

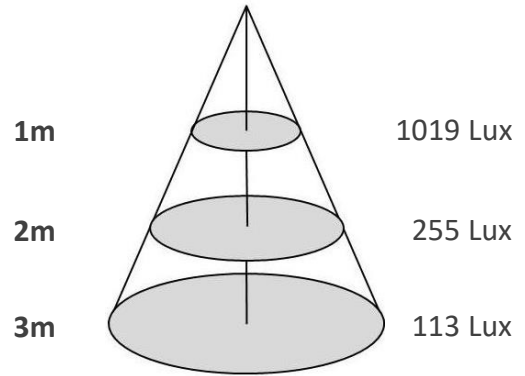

WALL1500LB-C-40W.lux

